

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.


**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification 7 : C07C 69/15, 67/055, 51/215, 53/08</p>	<p>A1</p>	<p>(11) International Publication Number: WO 00/69802</p> <p>(43) International Publication Date: 23 November 2000 (23.11.00)</p>
<p>(21) International Application Number: PCT/EP00/04234</p> <p>(22) International Filing Date: 9 May 2000 (09.05.00)</p> <p>(30) Priority Data: 09/312,683 14 May 1999 (14.05.99) US</p> <p>(71) Applicant (for all designated States except US): SAUDI BASIC INDUSTRIES CORPORATION [SA/SA]; P.O. Box 5101, Riyadh 11422 (SA).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): KARIM, Khalid [GB/GB]; 25 Monica Grove, Burnage, Manchester, M19 2BQ (GB); ADRIS, Alaa, E., M. [EG/SA]; P.O. Box 42503, Riyadh 11551 (SA).</p> <p>(74) Agent: SCHMITZ, Jean-Marie; Dennemeyer & Associates S.A., 55, rue des Bruyères, L-1274 Howald (LU).</p>		<p>(81) Designated States: CN, ID, JP, KR, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published · With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>

(54) Title: METHOD FOR PRODUCING VINYL ACETATE MONOMER FROM ETHANE OR ETHYLENE OXIDATION

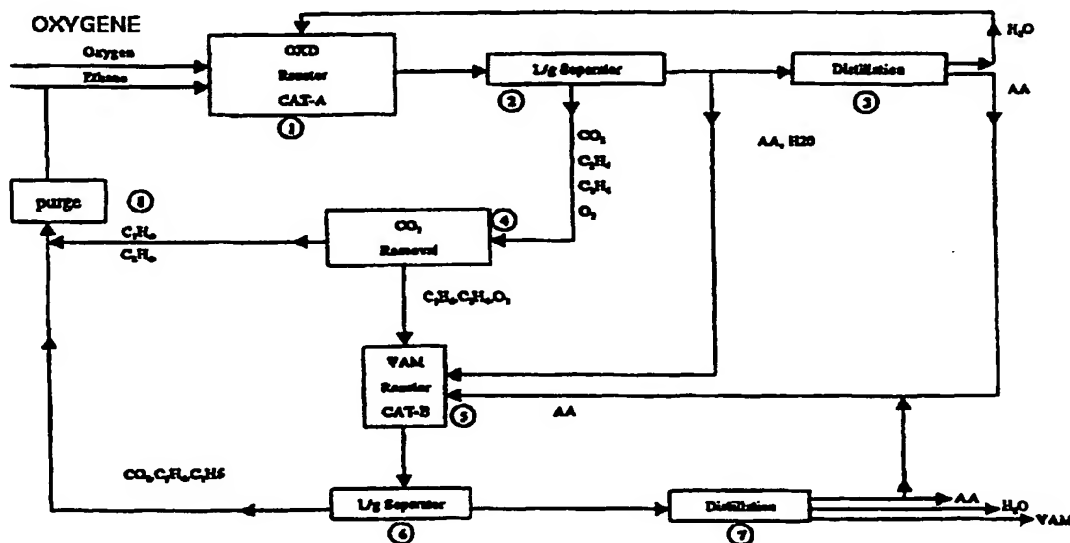

(57) Abstract

Methods for the catalytic production of vinyl acetate monomer from ethane, ethylene or an ethane/ethylene mixture using a first catalyst containing MoVNbPd, MoVLAPdNbX (where X is Al, Ga, Ge or Si) or MoVNBX (where X is P, B, Hf, Te, As or mixtures thereof) in the first step of oxidation and using a conventional VAM catalyst for the second step. The method produces high yields to acetic acid and vinyl acetate without the coproduction of carbon monoxide. Furthermore, the ethylene and acetic acid produced in the first step may be utilized in the second step for VAM production.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LJ	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

TITLE OF THE INVENTION

METHOD FOR PRODUCING VINYL ACETATE
MONOMER FROM ETHANE OR ETHYLENE OXIDATION

BACKGROUND OF THE INVENTIONField of the Invention

The invention relates to improved integrated methods of making vinyl acetate monomers from ethane or ethylene using metal oxide catalysts.

Description of the Related Art

Several publications are referenced in this application. These references describe the state of the art to which this invention pertains and are hereby incorporated by reference.

The utilization of lower alkanes (C_1 - C_4) as feed stock to produce value added petrochemicals is an industrially desired process. Lower alkanes are low cost and environmentally acceptable because of their low chemical reactivity. There are only a few commercially available chemical catalytic processes, which utilize lower alkanes as a feed, such as butane to maleic anhydride.

Vinyl acetate monomer (VAM) is a well-known industrial chemical. The production of VAM from ethylene, oxygen and acetic acid using conventional VAM catalysts is known in the art. VAM is typically used as a raw material for vinyl resins such as polyvinyl acetate. VAM was previously primarily manufactured

from the vapor phase reaction of ethylene, acetic acid and oxygen with a zinc acetate catalyst.

More recently, VAM has been produced from the vapor-phase reaction of ethylene, acetic acid and oxygen, with a palladium catalyst. For example, VAM may be made from ethylene wherein the first step involves reacting the ethylene to form acetic acid, followed by a second step of reacting a mixture of the acetic acid and ethylene to form vinyl acetate.

Numerous methods are known for the catalytic oxidation of ethylene to acetic acid. See, for example, U.S. Patent Nos. 3,792,087 and 3,970,697. Similarly, numerous methods are known for the catalytic production of vinyl acetate by reacting ethylene with acetic acid and oxygen in the gaseous phase. See, U.S. Patent Nos. 3,190,912; 3,637,819; 3,650,896; 4,370,492; 5,185,308; and 4,902,823.

PCT Patent Publication WO 98/05620 describes the production of acetic acid and/or vinyl acetate from ethylene (or ethane) using a first catalyst active for the oxidation of ethylene to acetic acid and/or active for the oxidation of ethane to acetic acid, ethylene and carbon monoxide, and a second catalyst active for the production of vinyl acetate. The patent also describes an additional necessary step for conversion of carbon monoxide to carbon dioxide. This is because carbon monoxide is poisonous to the VAM catalyst.

U.S. Patent No. 4,188,490 relates to a catalytic oxidation process for the production of mixtures of acetic acid

and vinyl acetate comprising the step of contacting a feed mixture containing ethylene, oxygen and water (as steam) with a catalyst composition to provide a mixture of acetic acid and vinyl acetate. The catalyst system comprises a palladium metal on a zinc oxide support treated in the presence of a sulfur modifier. The method requires the subsequent step of fractional distillation to separate the acetic acid from the vinyl acetate. Alternatively, the acetic acid contained in the product mixture is converted in situ to an alkali metal salt such as sodium acetate. The method also requires the step of treating the catalyst with the sulfur modifier by, for example, flowing moist air containing SO_2 over the catalyst at 200°C for about one hour.

Several methods for producing vinyl acetate from ethylene result in the production of carbon monoxide. The production of carbon monoxide is disadvantageous because it is poisonous to the second stage catalyst. Moreover, carbon monoxide is also a less desirable by-product due to environmental law constraints. In order to avoid this problem, it is necessary to introduce another catalytic reactor for the total oxidation of CO to CO_2 . This can add significant costs to the catalytic process.

Accordingly, it would be desirable to provide an improved method for the selective production of vinyl acetate monomer from ethane without the production of carbon monoxide.

OBJECTS OF THE INVENTION

It is an object of the invention to overcome the above-identified deficiencies.

It is another object of the invention to provide an improved catalytic method for the production of vinyl acetate.

It is a further object of the invention to provide an improved catalytic method for the oxidation of ethylene to produce vinyl acetate.

It is a further object of the invention to provide an improved catalytic method for the oxidation of ethane to produce vinyl acetate.

It is a still further object of the invention to provide an improved catalytic method for the oxidation of ethane, ethylene or a mixture of ethane and ethylene to produce vinyl acetate without the production of carbon monoxide as a by-product.

It is yet another object of the invention to provide an improved catalytic method for the single stage oxidation of ethane or ethylene or mixtures thereof to vinyl acetate.

The foregoing and other objects and advantages of the invention will be set forth in or be apparent from the following description.

SUMMARY OF THE INVENTION

According to the present invention, vinyl acetate is produced catalytically from ethane feed stocks. Another aspect

of the invention relates to the production of vinyl acetate from ethylene. The catalysts suitable for use in the methods of the invention are active and selective to the desired end product, vinyl acetate. The catalytic process for the production of VAM from ethane involves two steps. In the first step, a catalyst (the "first catalyst") is used to provide the function of activation of ethane to ethylene and acetic acid. In the second step, ethylene and acetic acid are further oxidized to VAM in the presence of a conventional VAM catalyst (the "second catalyst"). Another preferred embodiment relates to a method of forming a stoichiometric mixture of ethylene and acetic acid using the first catalyst, which mixture can be directly fed into a vinyl acetate reactor containing the VAM catalyst without adjustments. Yet another preferred embodiment relates to a catalytic method wherein ethylene or ethane is converted to vinyl acetate in a single stage reactor.

Advantageously, the preferred catalytic methods of the invention do not produce carbon monoxide. This is advantageous because carbon monoxide is not environmentally friendly and can have a significant impact on down stream separation costs, as well as on the poisoning of the VAM catalyst.

Other objects as well as aspects, features and advantages of the present invention will become apparent from a study of the present specification, including the claims, figures and specific examples.

DESCRIPTION OF THE FIGURES

Figure 1 is a schematical representation of a ethane to VAM reaction scheme according to one embodiment of the invention.

Figure 2 is a schematical representation of a ethane to VAM reaction scheme according to another embodiment of the invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The invention relates to novel methods of producing vinyl acetate. In the first step, the first catalyst is used which provides the dual functions of (a) activation of ethane (or ethane/ethylene) to acetic acid and ethylene and (b) ethylene to acetic acid. In the second step, vinyl acetate is formed through further oxidation of ethylene with acetic acid in the presence of a second catalyst, the VAM catalyst. According to one preferred embodiment, the catalysts of the invention can also be used to provide an optimal feed to a vinyl acetate reactor. That is, catalytically oxidizing ethane (or ethylene/ethane) to form a mixture containing the optimal stoichiometric mixture of ethylene and acetic acid for use as a feed to a vinyl acetate reactor containing the conventional VAM catalyst, such as a Pd/Al catalyst.

The catalyst system suitable for the first step of the present invention (the first catalyst) can be formed from compositions including a catalyst (a) of the formula $\text{Mo}_a\text{V}_b\text{Nb}_c\text{Pd}_d$, wherein:

a is 1 to 5;
b is 0 to 0.5;
c is 0.01 to 0.5; and
d is 0 to 0.2.

The numerical values of a, b, c and d represent the relative gram-atom ratios of the elements Mo, V, Nb and Pd, respectively, in the catalyst. The elements are preferably present in combination with oxygen in the form of various oxides.

Another catalyst system, catalyst (b), has a composition comprising the elements Mo, V, Pd, Nb, La, and X (where X is Al, Ga, Si, or Ge) in the form of oxides in the ratio $\text{Mo}_a\text{V}_b\text{La}_c\text{Pd}_d\text{Nb}_e\text{X}_f$, wherein:

a is 1;
b is 0.01 to 0.9;
c is > 0 to 0.2;
d is > 0 to 0.2.
e is > 0 to 0.2; and
f is > 0 to 0.3.

The numerical values of a, b, c, d, e and f represent the relative gram-atom ratios of the elements Mo, V, Pd, La, Nb and X, respectively, in the catalyst. The elements are preferably present in combination with oxygen in the form of various oxides.

Another catalyst system, catalyst (c), suitable for the invention is formed from a calcined composition of $\text{Mo}_a\text{V}_b\text{Nb}_c\text{X}_d$, wherein:

- X is at least one promoter element selected from the group consisting of: P, B, Hf, Te, and As;
- A is about 1 to 5;
- b is 1;
- c is about 0.01 to 0.5; and
- d is about 0 to 0.1.

The numerical values of a, b, c and d represent the relative gram-atom ratios of the elements Mo, V, Nb and X, respectively, in the catalyst. The elements are preferably present in combination with oxygen in the form of various oxides.

The first catalyst (catalysts (a) or (b) or (c) or mixtures thereof) and methods of making the first catalyst are set forth in copending U.S. Application Serial No. 08/932,075 (Attorney Docket No. 582815-2060), filed September 17, 1997, entitled "Catalysts for the Oxidation of Ethane to Acetic Acid, Processes of Making the Same and Processes of Using the Same"; U.S. Patent Application Serial No. 08/997,913 (Attorney Docket No. 582815-2080), filed December 24, 1997, entitled "Catalyst for Producing Acetic Acid from Ethane Oxidation, Processes of Making the Same and Methods of Using the Same" and U.S. Serial No. 09/219,702, filed December 23, 1998, (Attorney Docket KR80577-40), entitled "Catalysts for the Oxidation of Ethane to Acetic Acid, Methods of Making and Using the Same", each of which is herein incorporated by reference.

One broad aspect of the invention relates to the production of vinyl acetate from ethane, ethylene or mixtures of ethane and ethylene. The method utilizes a first catalyst ((a) or (b) or (c) or mixtures thereof) providing the functions of activation of ethane to acetic acid and ethylene and further oxidation of ethylene with acetic acid to vinyl acetate using a conventional VAM catalyst such as a Pd/Al catalyst. Overall, the recycled yield for vinyl acetate can be greater than 95%.

Advantageously, the methods of the invention produce vinyl acetate with zero (or nondetectable) or insignificant production of carbon monoxide. Preferably, less than 0.1 wt% carbon monoxide is produced as an end product using the invention, more preferably less than 0.01% and most preferred no detectable carbon monoxide is produced. Accordingly, one preferred aspect of the invention relates to a method which employs a catalyst designed in such way that it does not produce any CO, which saves the treatment step of converting CO to CO₂.

One embodiment of the invention comprises reacting ethane with oxygen and water (e.g. steam) in the presence of a first catalyst ((a) or (b) or (c) or mixtures thereof) to form a mixture containing ethylene and acetic acid which is then reacted to form vinyl acetate.

The raw material used as the source for the ethane or ethylene/ethane can be a gas stream, which preferably contains at least five volume percent of ethane/ethylene. The gas can also contain minor amounts of the C₃-C₄ alkanes and alkenes,

preferably less than five volume percent of each. The gas stream can also contain major amounts, preferably more than five volume percent, of nitrogen, carbon dioxide, and water in the form of steam.

The reaction mixture useful in carrying out the process is generally from 5 to 50 moles % of ethane, 5 to 50 moles % of molecular oxygen either as pure oxygen or in the form of air, and optionally 2 to 50 moles % of water in the form of steam. The amount of oxygen present may be a stoichiometric amount, or lower, of the hydrocarbons in the feed. Other gases may be used as reaction diluents or heat moderators such as helium, nitrogen, and carbon dioxide.

The gaseous components of the reaction mixture are preferably uniformly admixed prior to being introduced into the reaction zone. The components may be preheated, individually or after being mixed, prior to being introduced into the reaction zone.

The first reaction zone, containing the first catalyst ((a) or (b) or (c) or mixtures thereof), generally has a pressure of from 15 to 500 psi, preferably from 150 to 350 psi; a temperature of from about 100°C to about 450°C, preferably from 200°C to 350°C, more preferably from 250°C to 300°C; a contact time between the reaction mixture and the catalyst of from about 2 seconds to about 100 seconds, preferably from 5 seconds to 30 seconds; and a space hourly velocity of from about 50 to about

50,000 h⁻¹, preferably from 100 to 10,000 h⁻¹ and most preferably from 200 to 3,000 h⁻¹.

According to one preferred embodiment, the process occurs in two stages. In the first stage, a mixture comprising ethane or ethylene, oxygen or a compound capable of providing oxygen and water (e.g., steam) is reacted to form a mixture containing ethylene, acetic acid, oxygen and water (e.g., steam). The product mixture of the first stage is then fed into the second stage and reacted to produce vinyl acetate.

The feed from the first stage may be adjusted prior to being introduced into the second stage. For example, the oxygen, ethylene and acetic acid concentration may be adjusted to optimize the catalytic reaction. Preferably, the first stage of the process produces a stoichiometric composition of acetic acid and ethylene as a feed for the second stage. According to one particularly preferred embodiment, adjustments of the feed for the second reactor are not required as the mixture produced in the first stage can be directly fed into the second stage. Thus, a dual-function catalyst can be used in the first stage to provide the feed stock for the second stage, which may contain a conventional Pd/Al VAM catalyst or any catalyst suitable for converting the feed stock of acetic acid and ethylene to VAM.

Therefore, using the present invention, VAM can also be directly produced from only ethane, oxygen and water without additional components since the outlet of the first reactor may be optimized to contain a stoichiometric mixture of acetic acid,

ethylene and oxygen which is the feed mixture for the second reactor. Preferably, the temperature and pressure of the feed from the first stage are also not adjusted prior to the second stage.

According to one embodiment, the output from either the first or second stage is recycled into the same or an earlier stage. For example, the output from stage 1 may be recycled into stage 1 or the output from stage 2 may be recycled into stage 1 and/or stage 2.

According to another embodiment, the reaction zone comprises multiple stages of bilayered catalyst consisting of layers of a first catalyst ((a) or (b) or (c) or mixtures thereof) according to the invention and a second conventional vinyl acetate catalyst. In this manner, the first catalyst converts ethane to a mixture of acetic acid and ethylene, preferably to an optimal mixture, and the second catalyst converts the ethylene/acetic acid to vinyl acetate in a single reaction zone.

Accordingly, one preferred embodiment relates to a process carried out in a single stage with all the reactants being supplied as a single feed with unreacted initial reactants being recycled. However, multiple stage addition of oxygen to the reactor with an intermediate hydrocarbon feed can also be used. This may improve productivity to vinyl acetate and avoid potentially hazardous conditions.

Two possible integrated schemes using the first catalyst and the second VAM catalyst for direct production of VAM from ethane or ethane/ethylene mixtures without producing carbon monoxide are shown in Figures 1 and 2.

Figure 1 is schematical representation of one reaction scheme A according to one embodiment of the invention. The partial oxidation reactor 1 containing the first catalyst (CAT-A) converts fresh and recycled ethane or ethane/ethylene with oxygen into ethylene, acetic acid and carbon dioxide. An optimum amount of water from distillation reactor 3 is also introduced to partial oxidation reactor 1 in order to increase the acetic acid selectivity. The effluent from partial oxidation reactor 1 enters a gas/liquid separation unit 2. The gas stream from gas/liquid separation unit 2 is recycled to partial oxidation reactor 1 or goes to carbon dioxide absorption unit 4, where CO_2 is removed. The liquid stream from gas/liquid separation unit 2 goes to distillation unit 3, where acetic acid is separated from water or the liquid stream from gas/liquid separation unit 2 can directly go to VAM reactor 5 containing a conventional VAM catalyst (CAT-B). The treated gases consisting of ethane, ethylene and oxygen and the liquid stream consisting of acetic acid or acetic acid and water are fed to VAM reactor 5 to produce VAM, CO_2 and unreacted ethane, ethylene and acetic acid. The effluent of VAM reactor 5 is then fed to gas liquid separation unit 6 where gases including ethane, ethylene and CO_2 are separated, partially purged to control the build up of non

reacting species in purge unit 8 and recycled back to partial oxidation reactor 1. The liquids are sent to distillation unit 7 for recovery of VAM. Acetic acid or unreacted acetic acid is recycled back to VAM reactor 5.

Figure 2 is a schematical representation of reaction scheme B according to another embodiment of the invention. The partial oxidation reactor 21 containing the first catalyst (CAT-A) converts fresh and recycled ethane or ethane/ethylene with oxygen into ethylene, acetic acid and carbon dioxide. The effluent of reactor 21 is fed to VAM reactor 23 containing the VAM catalyst (CAT-B) via optional heat exchanger 22, which allows adjustment of the temperature of the feed to VAM reactor 23. Optionally, the two catalysts CAT-A and CAT-B can be in one reactor in the form of a physical mixture or in alternating layer form. Additional amounts of gases to VAM reactor 23, such as ethylene, acetic acid, and oxygen may be added depending upon the process conditions. The effluent from VAM reactor 23 is fed to gas/liquid separation unit 24, where gases including CO_2 , C_2H_4 , and C_2H_6 are separated from liquid VAM, acetic acid and water. The gas streams from gas/liquid separation unit 24 are recycled via carbon dioxide removal unit 25 to reactor 21. Optionally, the gas streams can also be recycled to reactor 21 without the absorption unit 25, as the catalyst CAT-A in the reactor 21 is not affected by the presence of carbon dioxide. Further, a specific amount of carbon dioxide also enhances the performance of the catalyst CAT-A. Gases are partially purged to control the

build up of non reacting species in purge unit 27. Liquid stream from separator unit 24 is fed to distillation unit 26 where acetic acid is separated from VAM and water and is optionally recycled to reactor 23 for make up or can be recovered. VAM goes to a recovery unit and H₂O is recycled to reactor unit 21 for enhancement of acetic acid and selectivity.

EXAMPLES

The following examples are illustrative of some of the products and methods of making and using the same falling within the scope of the present invention. They are, of course, not to be considered in any way limitative of the invention. Numerous changes and modifications can be made with respect to the invention.

Catalytic oxidation processes using a first catalyst ((a) or (b) or (c) or mixtures thereof) were carried out in a tubular reactor under the following conditions. All experiments were run at the temperatures set forth below ranging from 260°C to 286°C, at a pressure of about 200 psig.

Reaction products were analyzed on-line by gas chromatography. Oxygen, nitrogen and carbon monoxide were analyzed using a 3 mm by 3 mm column of 13X molecular sieve. Carbon dioxide, ethane, ethylene and water were analyzed using a 1.8 m by 3mm column packed with material sold under the name

HAYASEP™Q. Acetic acid was analyzed using a 0.5 m by 3 mm column packed with material sold under the name PORAPACK™ N.

In all cases, the conversion and selectivity calculations were based on the stoichiometry.

Data for the stage I reaction mentioned in the examples is experimental and the production of vinyl acetate (VAM) data in the stage II is calculated based on 92% yield to VAM from ethylene (Chem. System 91-10, Oct. 1992, herein incorporated by reference).

Example 1: The Production of VAM from Ethylene:

The first catalyst (catalyst (a)): $\text{MoV}_{0.396}\text{Nb}_{0.128}\text{Pd}_x\text{O}_y$ (where $x = 1.90\text{e-}04$ and y is based on the co-ordination valence)

Process conditions for stage I reactor: 286°C/200 psi

Process conditions for stage II reactor as described in reference Chem. System 91-10, Oct. 1992.

Results data:

Compound (g.mol.min.)	Stage I		Stage II	
	Feed	Product	Feed	Product
Ethylene	5.65E-4	2.07E-4	2.07E-4	
Oxygen	6.73E-4	1.23E-4	1.23E-4	
Nitrogen	2.53E-3	2.47E-4		
Water	2.23E-5	2.13E-4		
Acetic Acid		2.80E-4	2.80E-4	
CO ₂		1.56E-4		
VAM				1.90E-4

The nitrogen, CO₂ and water are diluents in the stage II reaction.

Example 2: The Production of VAM from Ethane

First catalyst (catalyst (a)): $\text{MoV}_{0.396}\text{Nb}_{0.128}\text{Pd}_x\text{O}_y$ (where x is 1.90e-04 and y is based on the co-ordination valence)

Process conditions for stage I reactor: 286°C/200 psi.

Process conditions for stage II reactor as described in Chem System 91-10, Oct. 1992.

Results Data:

Compound (g.mol.min.)	Stage I		Stage II	
	Feed	Product	Feed	Product
Ethane	4.43E-04	2.40E-4		
Oxygen	5.10E-04	5.07E-05	5.07E-05	
Nitrogen	1.92E-03	1.98E-03		
Water		3.18E-04		
Ethylene		8.86E-05	8.86E-05	
Acetic Acid		9.28E-05	9.28E-05	
CO ₂		1.77E-04		
VAM				9.00E-5

The nitrogen, CO₂ and water act as diluents in stage II.

Example 3: The Production of VAM from Ethane

First catalyst (catalyst (a)): $\text{Mo}_{2.5}\text{V}_{1.0}\text{Nb}_{0.32}\text{Pd}_{0.03}\text{O}_y$ (where y is based on the coordination valence)

Process conditions for stage I reactor: 260°C/200 psi.

Process conditions for stage II reactor as described in Chem. System 91-10, Oct. 1992.

Results Data:

Compound (g.mol.min.)	Stage I		Stage II	
	Feed	Product	Feed	Product
Ethane	1.91E-04	7.87E-05		
Oxygen	2.25E-04	1.30E-05	5.07E-5	
Nitrogen	8.45E-04	8.40E-04		
Water		1.87E-04		
Ethylene		3.41E-05	3.41E-05	
Acetic Acid		4.08E-05	4.08E-05	
CO ₂		3.53E-05		
CO		4.68E-05		
VAM				3.13E-5

The nitrogen, CO₂, and water act as diluents in stage II.

Based on the above-described catalytic data, the following general characteristics can be concluded for the methods of the invention:

1. The catalytic methods used show high selectivity to vinyl acetate by oxidizing mixtures of ethane and ethylene.
2. The catalytic methods used also show high selectivity to vinyl acetate by oxidizing ethane.
3. The catalytic method systems used produce vinyl acetate without the production of by-products such

as carbon monoxide. This advantage reduces the step of CO conversion to CO₂ in the conventional VAM process.

The above description of the invention is intended to be illustrative and not limiting. Various changes or modifications in the embodiments described may occur to those skilled in the art. These can be made without departing from the spirit or scope of the invention.

CLAIMS:

1. A process for the production of vinyl acetate monomer comprising the steps of: (1) contacting a gaseous feed mixture of ethane or ethylene or ethane/ethylene, steam and a molecular oxygen containing gas in the presence of a first catalyst active for oxidation of ethane, ethylene or ethane/ethylene to produce a selective stream of acetic acid, ethylene, carbon dioxide and water and (2) converting a second feed mixture comprising ethylene, acetic acid and oxygen to vinyl acetate monomer in the presence of a second catalyst active for the production of vinyl acetate, wherein said process does not include an intermediate separation step to remove the CO between the two reaction steps.

2. The process of claim 1, wherein said process produces no carbon monoxide.

3. The process of claim 2, wherein the first oxidation catalyst is selected from the following catalyst compositions:

a) a catalyst composition comprising the elements Mo, V, Nb, and Pd, in the form of oxides, in the ratio $\text{Mo}_a\text{V}_b\text{Nb}_c\text{Pd}_d$ wherein:

a is 1 to 5;

b is 0 to 0.5;

c is 0.01 to 0.5; and

d is > 0 to 0.2;

- b) a catalyst composition comprising the elements Mo, V, Pd, Nb, La and X, in the form of oxides, wherein X is Al, Ga, Si or Ge, in the ratio $\text{Mo}_a\text{V}_b\text{La}_c\text{Pd}_d\text{Nb}_e\text{X}_f$ wherein:

a is 1;
b is 0.01 to 0.9;
c is > 0 to 0.2;
d is > 0 to 0.2;
e is > 0 to 0.2; and
f is > 0 to 0.3; and

- c) a catalyst composition comprising the elements Mo, V, Nb and X (where X is P, B, Hf, Te, As or mixtures thereof) in the form of an oxide, in the following ratio $\text{Mo}_a\text{V}_b\text{Nb}_c\text{X}_d$ wherein:

a is 1 to 5;
b is > 0 to 0.1;
c is 0.01 to 0.5;
d is > 0 to 0.1.

4. The process of claim 2, wherein said first catalyst consists essentially of catalyst composition (a), catalyst composition (b), catalyst composition (c) or mixtures thereof.

5. The process of claim 2, wherein said first catalyst and second catalyst are in the form of a fixed or fluidized bed or a solid moving bed reactor.

6. The process of claim 2, wherein said feed mixture is fed into a second reaction zone.

7. The process of claim 6, wherein the second feed mixture for the second step comprises ethylene, acetic acid, CO₂ and oxygen.

8. The process of claim 2, wherein said feed mixture comprises molecular oxygen ranging from 0.1 to 25% by volume of the feed mixture.

9. The process of claim 2, wherein said feed mixture is diluted with N₂ in an amount ranging from 5 to 90% by volume.

10. The process of claim 2, wherein said feed mixture is diluted with steam in an amount ranging from 0 to 40% by volume.

11. The process of claim 2, wherein said feed mixture comprises from 1% to 95% by volume of ethane, ethylene or mixtures thereof.

12. The process of claim 2, wherein first step oxidation is achieved at a temperature of from 150 to 450°C, under a pressure of from 15 to 600 psi, and with a contact time between reaction mixture and the catalyst of from 0.1 to 60 seconds.

13. The process of claim 2, wherein said contacting comprises reacting ethane or ethane/ethylene with steam and oxygen or a compound capable of providing oxygen in the presence of said first catalyst in a first reaction zone to form a first product mixture comprising ethylene, oxygen, steam and acetic

acid and the said first product mixture is fed into a second reaction zone wherein the ethylene and acetic acid react to form vinyl acetate in the presence of said second reaction catalyst.

14. The process of claim 13, wherein said first product mixture is fed directly into said second reaction zone without adding additional components.

15. The process of claim 13, wherein said first product mixture is fed into said second reaction zone with addition/adjustment of ethylene, acetic acid, oxygen or combinations thereof.

16. The process of claim 13, wherein said first product mixture is subjected to temperature and/or pressure adjustments prior to being fed into said second reaction zone.

17. A process of producing vinyl acetate monomer comprising the step of catalytically oxidizing ethane to form vinyl acetate in a single reaction zone containing a first catalyst having activity for oxidation of ethane to ethylene and acetic acid and a second catalyst having activity for oxidation of ethylene with acetic acid to vinyl acetate, wherein said first catalyst is at least one catalyst selected from the following catalyst compositions:

- a) a catalyst composition comprising the elements Mo, V, Nb, and Pd in the form of oxides, in the ratio $\text{Mo}_a\text{V}_b\text{Nb}_c\text{Pd}_d$ wherein:

a is 1 to 5;

b is 0 to 0.5;

c is 0.01 to 0.5; and

d is > 0 to 0.2;

- b) a catalyst composition comprising the elements Mo, V, Pd, Nb, La and X, in the form of oxides, wherein X is Ga, Si, Al or Ge, in the ratio $\text{Mo}_a\text{V}_b\text{La}_c\text{Pd}_d\text{Nb}_e\text{X}_f$ wherein:

a is 1;

b is 0.01 to 0.9;

c is > 0 to 0.2;

d is > 0 to 0.2;

e is > 0 to 0.2; and

f is > 0 to 0.3; and

- c) a catalyst composition comprising the elements Mo, V, Nb and X (where X is P, B, Hf, Te, As or mixtures thereof) in the form of an oxide, in the following ratio $\text{Mo}_a\text{V}_b\text{Nb}_c\text{X}_d$ wherein:

a is 1 to 5;

b is > 0 to 0.1;

c is 0.01 to 0.5; and

d is > 0 to 0.1.

18. The process of claim 17, wherein said single reaction zone comprises a mixture of said first catalyst and said second catalyst.

19. The process of claim 17, wherein said single reaction zone comprises layers of said first reaction catalyst and said second catalyst.

20. The process of claim 2, wherein said process produces ethylene, acetic acid, VAM or combinations thereof.

1 / 2

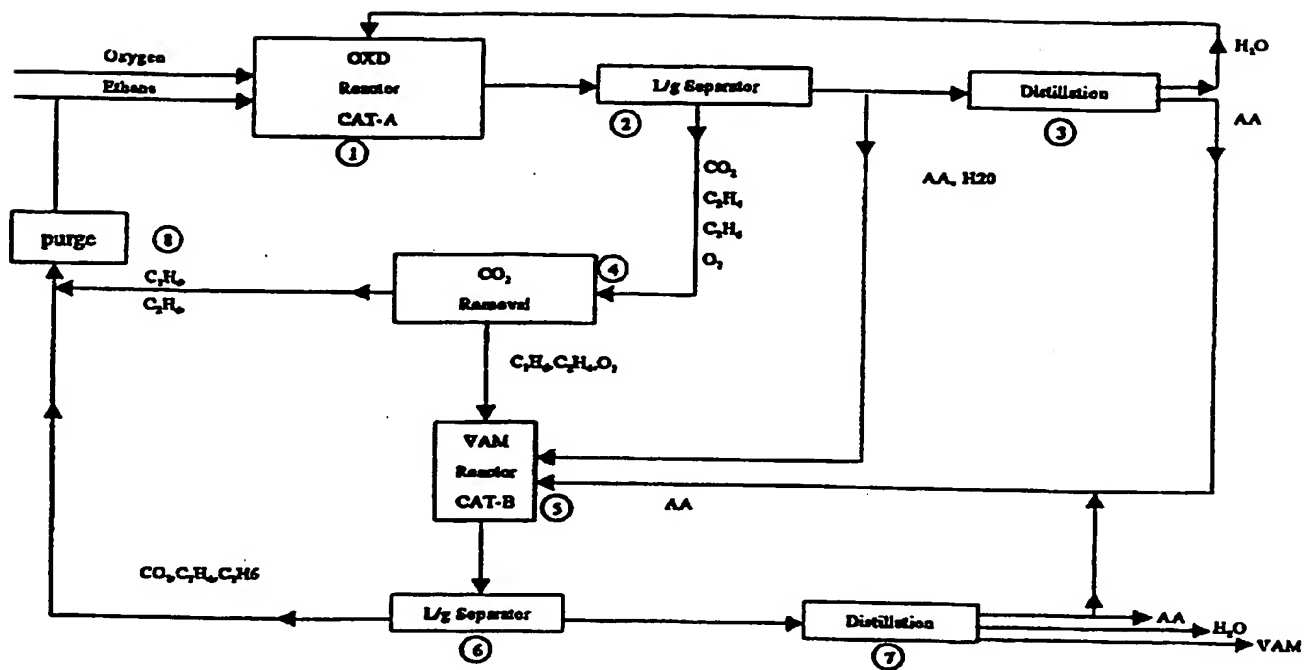


FIGURE 1

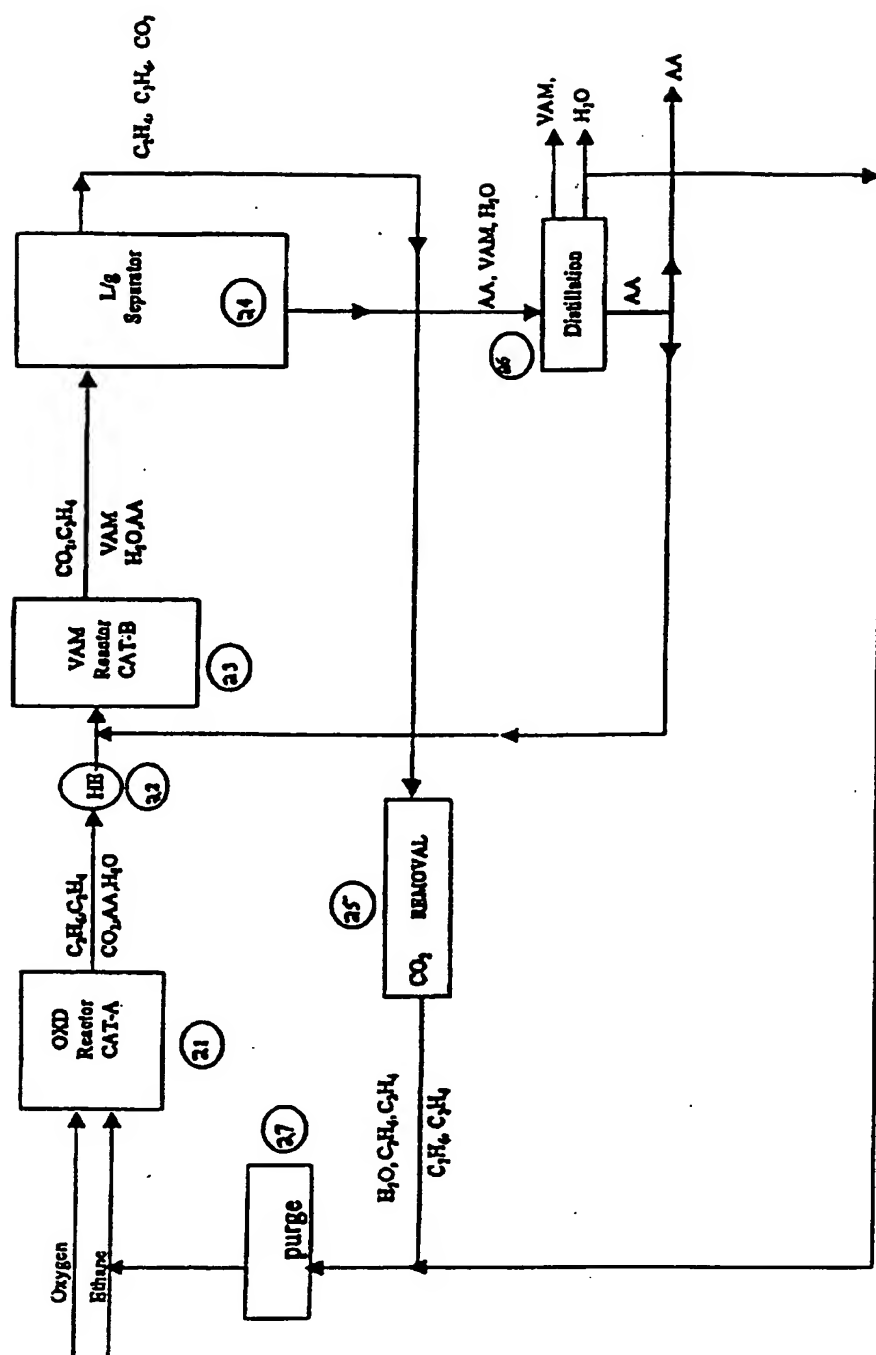


FIGURE 2

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 00/04234

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C07C69/15 C07C67/055 C07C51/215 C07C53/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C07C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98 05620 A (BP CHEMICALS LIMITED) 12 February 1998 (1998-02-12) cited in the application page 14 -page 16; claims figure 1	1
X	WO 99 13980 A (SAUDI BASIC INDUSTRIES CORPORATION) 25 March 1999 (1999-03-25) page 27 -page 34; claims 1,3-39	1,3,5
X	DE 196 30 832 A (HOECHST AG) 5 February 1998 (1998-02-05) page 2, line 48 -page 3, line 24 page 3, line 52 - line 9 page 6; table 1 page 6 -page 7; claims	1,3,5

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

12 September 2000

Date of mailing of the international search report

25/09/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Kinzinger, J

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/04234

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9805620 A	12-02-1998	AU 3778997 A	25-02-1998
		BR 9706542 A	20-07-1999
		CA 2232185 A	12-02-1998
		CN 1198732 A	11-11-1998
		EP 0877727 A	18-11-1998
		JP 11514675 T	14-12-1999
		NO 981223 A	18-03-1998
		US 6040474 A	21-03-2000
WO 9913980 A	25-03-1999	US 6013597 A	11-01-2000
		EP 0938378 A	01-09-1999
		US 5907056 A	25-05-1999
DE 19630832 A	05-02-1998	AU 716609 B	02-03-2000
		AU 4010597 A	25-02-1998
		BG 103119 A	29-10-1999
		BR 9710906 A	17-08-1999
		CN 1231656 A	13-10-1999
		CZ 9900316 A	14-07-1999
		WO 9805619 A	12-02-1998
		EP 0915821 A	19-05-1999
		NO 990363 A	26-01-1999
		PL 331374 A	05-07-1999
		SI 9720051 A	31-10-1999